

TwinPD



TEST SHEET
Serial number : 2601028
April 2026

VM Photonics GmbH
Burgberg 6
31832 Springe
Germany
info@vmphotonics.com

The VM Photonics **TwinPD**
equipped with two 1.5mm diameter silicon photodiodes (QE >= 90% @780nm).

Parameter	Result
Transimpedance gain	10 k Ω (per design)
DC x 10 gain	8.978 V V ⁻¹ , equivalent to: 89.78 k Ω (at 1 M Ω load)
DC x 10 bandwidth (-3 dB)	36 MHz
DC x 10 darknoise (100 kHz - 10 MHz)	< 3 pA / $\sqrt{\text{Hz}}$, equivalent to: 2.7×10^{-7} V / $\sqrt{\text{Hz}}$
AC gain	4.096 V V ⁻¹ , equivalent to: 40.96 k Ω (at 50 Ω load)
AC bandwidth (-3 dB)	5.6 kHz - 31 MHz
AC darknoise (100 kHz - 10 MHz)	< 3 pA / $\sqrt{\text{Hz}}$, equivalent to: 1.2×10^{-7} V / $\sqrt{\text{Hz}}$
Photodiode bias voltage	+/- 5 V

Signal to darknoise measurements:

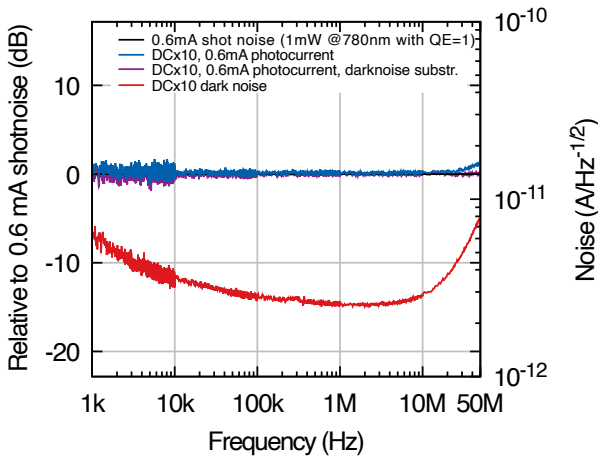


Fig. 1: DC x 10 output:
Dark noise and bright noise calibrated to photocurrent with the transfer function below, measured with 1 M Ω load.

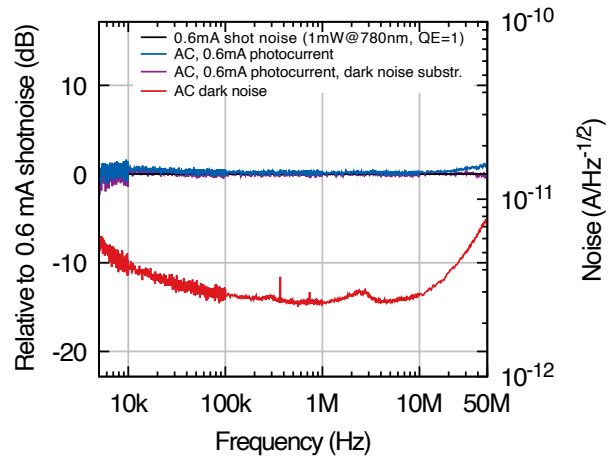


Fig. 2: AC output:
Dark noise and bright noise calibrated to photocurrent with the transfer function below, measured with 50 Ω load.

Transfer function measurements:

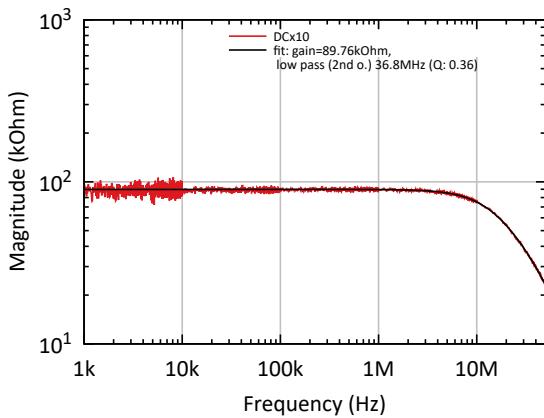


Fig. 3: DC x 10 output:
DC x 10 transfer function with silicon photodiodes, measured with 1M Ω load.

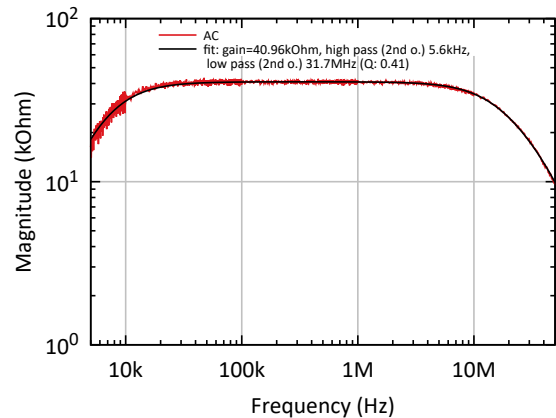


Fig. 4: AC output:
AC transfer function with silicon photodiodes, measured with 50 Ω load.